


JC05 Rec'd PCT/PTO 28 MAR 2002

FORM PTO-1390 (REV 10-94)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		DOCKET #: 4925-226PUS
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>				
				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) <b>10/089421</b>
INTERNATIONAL APPLICATION NO. <b>PCT/EP00/09499</b>		INTERNATIONAL FILING DATE <b>27 September 2000</b>		PRIORITY DATE CLAIMED <b>29 September 1999</b>
TITLE OF INVENTION <b>Estimating an Indicator for a Communication Path</b>				
APPLICANT(S) FOR DO/EO/US <b>Juan MELERO</b>				
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:				
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371</li> <li>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))           <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)</li> </ol> </li> <li>6. <input type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))           <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). <b>Unexecuted</b></li> <li>10. <input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>				
<b>Items 11. to 16. Below concern other document(s) or information included:</b>				
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.				
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.				
13. <input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.				
14. <input type="checkbox"/> A substitute specification.				
15. <input type="checkbox"/> A change of power of attorney and/or address letter.				
16. <input checked="" type="checkbox"/> Other items or information ( <i>specify</i> ): PCT Publication Sheet, Int'l Preliminary Examination Report, Int'l Search Report, PCT Request, PCT Demand, Notification Informing the Applicant of the Communication of the International Application to the Designated Office, and Notification of the Recording of a Change				

U.S. APPLICATION NO. (If known, see 37 CFR 1.491) <b>10/089421</b>		INTERNATIONAL APPLICATION NO. <b>PCT/EP00/09499</b>		ATTORNEY'S DOCKET NUMBER <b>4925-226PUS</b>	
17.[x]The following fees are submitted:					
<b>Basic National Fee (37 CFR 1.492(a)(1)-(5)):</b> Search Report has been prepared by the EPO or JPO .....\$890.00 International preliminary examination fee paid to USPTO (37 CFR 1.482).....\$710.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$740.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO .....\$1040.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) .....\$100.00					
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$	890
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
Claims	Number Filed	Number Extra	Rate		
Total Claims	11 - 20 =		x \$18.00	\$	
Independent Claims	2 - 3 =		x \$84.00	\$	
Multiple dependent claim(s) (if applicable)			+ \$280.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$	890
Reduction of 1/2 for filing by small entity, if applicable.				\$	
SUBTOTAL =				\$	890
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$	890
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by the appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$	
TOTAL FEES ENCLOSED				\$	890
Amount to be refunded:				\$	
charged:				\$	
a. [x] One check in the amount of \$ 890 to cover the above fee is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. 03-2412 in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. [x] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 03-2412. A duplicate copy of this sheet is enclosed.					
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO: <u>Michael C. Stuart</u> Cohen, Pontani, Lieberman & Pavane 551 Fifth Avenue, Suite 1210 New York, New York 10176			 <u>Michael C. Stuart</u> Registration Number: 35,698 March 28, 2002 Tel: (212) 687-2770		

01/31/03 12:09 FAX

Copy 10/089421  
RECEIVED TO 15 JUL 2002

By Express Mail # EV129275993US July 10, 2002

Attorney Docket # 4925-226PUS

Patent

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re National Phase PCT Application of

Juan MELERO et al.

International Appln. No.: PCT/EP00/09499

International Filing Date: September 27, 2000

For: Estimating an Indicator for a Communication  
Path

Assistant Commissioner for Patents  
Washington, DC 20231

SECOND PRELIMINARY AMENDMENT

SIR:

Prior to examination of the above-identified application, amend the application as follows:

In the Specification:

Page 1, before line 3, the title beginning with "Field of the Invention", insert the following title and paragraph:

-PRIORITY CLAIM

This is a national stage of PCT application No. PCT/EP00/09499, filed on September 27, 2000. Priority is claimed on that application, and on patent application No. 9923069.0 filed in Great Britain on September 29, 1999.

Preliminary Amendment

REMARKS

This preliminary amendment is presented to complete the claim for priority. Early examination and favorable consideration of the above-identified application is earnestly solicited.

Any additional fees or charges required at this time in connection with the application may be charged to our Patent and Trademark Office Deposit Account No. 03-2412.

Respectfully submitted,

COHEN, PONTANI, LIEBERMAN & PAVANE

By 

Michael C. Stuart  
Reg. No. 35,698  
551 Fifth Avenue, Suite 1210  
New York, N.Y. 10176  
(212) 687-2770

July 10, 2002

10/089421

IC10 Rec'd PCT/PTO 28 MAR 2002

By Express Mail # EV072606758US · March 28, 2002

Attorney Docket # 4925-226PUS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re National Phase PCT Application of

Juan MELERO

International Appln. No.: PCT/EP00/09499

International Filing Date: 27 September 2000

For: Estimating an Indicator for a Communication  
Path

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C. 20231  
**BOX PCT**

S I R:

Prior to examination of the above-identified application please amend the  
application as follows:

In the Specification:

On page 13, line 1, delete "Claims", and insert therefor --What is claimed is:--.

In the Claims:

3. A method according to claim 1, wherein the estimated network indicator is used  
for assessing the quality of the communication path.

5. A method according to claim 1, wherein the network indicator is obtained based on a correlation between the first indicator, the second indicator and the third indicator.

7. A method according to claim 1, comprising passing information about the first indicator, the second indicator and the third indicator to a controller of the communication system and computing the network indicator by the controller.

10. A communication system according to claim 8, wherein the estimated indicator is used for assessing the quality of the communication path.

11. A communication system according to claim 8, wherein the control unit is arranged to correlate the first indicator, the second indicator and the third indicator for obtaining the further indicator.

#### **REMARKS**


This preliminary amendment is presented to place the application in proper form for examination and to eliminate multiple dependency from the present claims. No new matter has been added. Early examination and favorable consideration of the above-identified application is earnestly solicited.

By Express Mail # EV072606758US · March 28, 2002

Attached hereto is a mark-up version of the changes made to the specification and claims by the current amendment. The attached page is captioned "Version with markings to show changes made".

Any additional fees or charges required at this time in connection with the application may be charged to our Patent and Trademark Office Deposit Account No. 03-2412.

Respectfully submitted,  
COHEN, PONTANI, LIEBERMAN & PAVANE

By:   
Michael C. Stuart  
Reg. No. 35,698  
551 Fifth Avenue, Suite 1210  
New York, N.Y. 10176  
(212) 687-2770

28 March 2002

By Express Mail # EV072606758US - March 28, 2002

**AMENDMENTS TO THE SPECIFICATION AND CLAIMS SHOWING CHANGES**

**In the Claims:**

3. A method according to claim 1 [or 2], wherein the estimated network indicator is used for assessing the quality of the communication path.

5. A method according to [any of the preceding claims] claim 1, wherein the network indicator is obtained based on a correlation between the first indicator, the second indicator and the third indicator.

7. A method according to [any of the preceding claims] claim 1, comprising passing information about the first indicator, the second indicator and the third indicator to a controller of the communication system and computing the network indicator by the controller.

10. A communication system according to claim 8 [or 9], wherein the estimated indicator is used for assessing the quality of the communication path.

11. A communication system according to [any of claims 8 to 10] claim 8, wherein the control unit is arranged to correlate the first indicator, the second indicator and the third indicator for obtaining the further indicator.



ESTIMATING AN INDICATOR FOR A COMMUNICATION PATH

## Field of the Invention

- 5 The present invention relates to a communication path or link in a communication system, and in particular, but not exclusively, to estimation of an indicator for use in managing a communication path between at least two stations of a communication system.

10

## Background of the Invention

- A communication network may comprise a cellular radio network consisting of cells. The cellular telecommunication networks typically operate in accordance with a given standard (or several standards) which sets out what the elements of the network are permitted to do and how that should be achieved. In most cases a cell can be defined as a certain area covered by one or several base transceiver stations (BTS) serving mobile stations (MS) within the cell via a radio interface. Each base-station has a radio transceiver capable of transmitting radio signals in downlink to and receiving radio signals in uplink from the area of a cell next to the base-station. By means of these signals the base station can communicate with the mobile station (MS) terminal in that cell, which itself includes a radio transceiver. Each base station may be connected to a base station controller (BSC) or to any other controller functionality provided by the cellular network. Thus a mobile station (MS) or similar user equipment (UE) within a cell of the system is continuously controlled by a node providing controller functionality. Examples of the network controller include said base station controller (BSC), a radio network controller (RNC) and a mobile switching center (MSC), but other control nodes may also be used for the

WO 01/24418

PCT/EP00/09499

implementation of the network control functionality. The controller can be linked further to the public telephone network and/or to other networks such as packet data networks. By means of this system a user of the MS can establish a  
5 telephone call to the public network via a BS in whose cell the MS is located.

The location of the MS could be fixed (for example if it is providing radio communications for a fixed site) or the MS  
10 could be moveable (for example if it is a hand portable transceiver or "mobile phone"). When the MS is moveable it may move between cells of the cellular radio system. As it moves from one cell (the "old cell") to another cell (the "new cell") there is a need to hand it over from communication with  
15 the BS of the old cell to the BS of the new cell without dropping the call due to a break in communications between the mobile station and the network. This process is known as handover. A need can also arise to hand over a MS whose location is fixed, for example if atmospheric conditions  
20 affect its communications with the old BS and call quality can be improved by handing it over to another BS or if there is a need to free up capacity of the old BS.

In some cellular systems a mobile station is capable of making  
25 traffic communications with more than one base station at one time. This macrodiversity arrangement allows greater reliability of communications and can reduce the required transmission power. It also means that handovers between one base station and another can be performed in a gradual  
30 ("soft") rather than an abrupt ("hard") way.

The control node conventionally receives information relating to the quality of communications between the MS and the BSs and optionally other information such as data on the load on

at least some of the BSs. The control node uses this information to various functions. For example, by using this information the control node may determine which base station(s) an MS should communicate with and issues instructions to the BS and the MS accordingly.

The mobile station and/or the base station may measure and/or define several indicators or parameters concerning the communication path connection, such as quality of the received signal, signal levels (power) between the receiving and transmitting stations, distance between the stations and so on. The stations can be provided with appropriate means for defining a value for any parameter that can be measured for the interaction between the mobile station and any of the base stations or the radio transmission conditions in a cell.

In a cellular radio communication system, such as the GSM based systems, voice quality in a transmission over a communication path between a base station and a mobile station can be assessed based on a network indicator determined for the connection. Corresponding indicators may be defined both in uplink and downlink.

Currently the most commonly used quality parameter or indicator is so called Bit Error Ratio (BER), which is used e.g. in the GSM (Global System for Mobile) based network systems. The BER is a measure defining the level of quality for data transmission expressed as the relationship between erroneous bits and the total number of transmitted bits. The BER can be defined e.g. by sending a known bit pattern and counting the number of incorrectly received bits in the receiver.

WO 01/24418

PCT/EP00/09499

A problem with the BER is that it measures the rate of the bit errors before an error correction mechanism. Therefore it does not take any improvements possibly produced by the error correction mechanism into the connection quality. If the functionality and/or efficiency of the error correction mechanism changes during the operation of the system, the BER values may no longer provide reliable information for assessing the quality of the transmission. The reliability of the BER based quality estimations may also become poorer due to new functionalities introduced into the network. The new functionalities could be such as Frequency Hopping or dynamic Channel Coding.

The inventor of the present invention has identified that frame erasure ratio (FER) could form a network indicator that could be used for the transmission quality estimation and that by using FER at least some of the problems of the BER could be avoided. In general, the FER represents the percentage of frames being dropped due to high number of non corrected bit errors in the frame. The FER can be a measurement of the results of 3-bit cyclic redundancy check for speech channels that is made along with a bad frame indicator (BFI). For signalling channels the FER is a measurement of errors in the block code used for the transmission.

A problem with the FER is that the current terminals do not report downlink FER to the network. There is no appropriate solution to manage the current terminals in a system that may base the connection control to an indicator such as the FER. It would thus be desirable to be able to define the FER or a similar network indicator by some other means than by receiving information of the indicator from a terminal that received the transmission.

## Summary of the Invention

It is an aim of the embodiments of the present invention to address one or several of the above problems.

5

According to one aspect of the present invention, there is provided a method in a communication system for estimating a network indicator of a communication path between a first station and a second station comprising:

10 determining at the second station a first indicator of the communication path in a direction from the first station to the second station;

determining at the first station a second indicator of the communication path in a direction from the second station  
15 to the first station, said second indicator associating to a corresponding feature of the communication path than said first indicator;

determining at the second station a third indicator of the communication path in the direction from the first station  
20 to the second station; and

estimating the network indicator of the communication path in the direction from the second station to the first station based on the determined first, second and third indicators.

25

According to another aspect of the present invention there is provided a communication system comprising a first station; a second station; a communication path between the first and the second stations; a measurement unit at the second station for  
30 determining a first indicator of the communication path in a direction from the first station to the second station; a measurement unit at the first station for determining a second indicator of the communication path in a direction from the second station to the first station, said second indicator

associating to a corresponding feature of the communication path than said first indicator; a measurement unit at the second station for determining a third indicator of the communication path in the direction from the first station to the second station; and control unit for estimating a further indicator of the communication path based on the determined first, second and third indicators.

According to further aspects the second station comprises a base station of a cellular communication system, the first station comprises a mobile station of the cellular communication system, the communication path comprises a radio link between the stations, the first indicator comprises a bit error ratio in uplink direction, the second indicator comprises a bit error ratio in downlink direction; the third indicator comprises a frame erasure ratio in uplink direction; and the network indicator to be estimated comprises a frame erasure ratio in downlink direction.

The estimated network indicator may be used for assessing the quality of the communication path.

The network indicator may be obtained based on a correlation between the first indicator, the second indicator and the third indicator. The network indicator may be obtained by multiplying said second indicator by the third indicators and dividing the result by the first indicator.

Information about the first indicator, the second indicator and the third indicator may be passed to a controller of the communication system and computing the network indicator by the controller.

Brief Description of Drawings

For better understanding of the present invention, reference will now be made by way of example to the accompanying drawings in which:

5 Figure 1 shows schematically the configuration of a part of a typical cellular radio telecommunications network;

Figure 2 is a more detailed illustration of a mobile station and base station pair;

10 Figure 3 is a flowchart illustrating the operation of one embodiment of the present invention.

#### Description of Preferred Embodiments of the Invention

15 The present reporting method and associated apparatus will be described below with general reference to the GSM system, but it will be understood that the method is analogously applicable to provide enhanced parameter estimation in other telecommunications systems.

20 Reference is made to Figure 1 illustrating one system in which the embodiments of the invention may be employed. The exemplifying system is a mobile radio communication system allowing a plurality of mobile stations MS1, MS2, MS3 to communicate with a base (transceiver) station BTS in a common  
25 cell via respective channels CH1, CH2, CH3. Although not shown, the mobile stations may also move from one cell to another cell. The radio communication between a transmitting station and a receiving station may be implemented in any appropriate manner and may be based on any communication  
30 standard. Therefore the communication path as such will not be described in more detail herein. It is sufficient to note that each base transceiver station (BTS) is arranged to transmit signals via a radio interface or link to and receive signals from the mobile stations MS located in a cell associated with

the given base transceiver station. Likewise, each mobile station MS is able to transmit signals to and receive signals via a radio interface or link from the base transceiver station BTS.

5

The base station is connected to a controller, which in one form of the exemplifying GSM system comprises a base station controller (BSC). The BSC may be connected further to a Mobile Switching Centre (MSC; not shown). In the described embodiment  
10 the BSC is used as a radio network controller. However, in some arrangements the MSC could be used for controlling one or several base stations. In some embodiment the BSC between the MSC and the base station may also be omitted. The network controller functionality is for controlling its service area,  
15 i.e. the cells and base stations connected to it. It is noted that typically more than one network controller is provided in a network. The network controller is also connected further to other elements or parts of the telecommunications network system via a suitable linking or gateway apparatus, such as  
20 Gateway Mobile Switching Centre (GMSC; not shown).

The implementation of the basic communication formatting between the mobile station, the base station and the controller in GSM systems is known, and will thus not be  
25 discussed in more detail herein. It is sufficient to note that the interface may comprise channels in both uplink and downlink directions between the mobile station in the cell associated with a given base station and that the information sent to and from the mobile station may be sent in any  
30 suitable format. The information may include, for example, an identification of a mobile station in a message sent from the mobile station identifying the particular mobile station (for instance, MS ID and/or IMSI (Mobile Station Identity and/or International Mobile Subscriber Identity, respectively)).



The mobile stations and the base station are arranged to perform measurements in order to be able to provide predefined information to the controller. These measurements may be of any appropriate feature that is in some way indicative of the quality or some other characteristics of traffic communications over the link between the mobile station and the base station. The information may comprise various parameters or indicators, such as an indicator from which it is possible to estimate the quality of the connection. Examples are signal strength of the base station for the cell as received at the mobile station and vice versa, error rate of communications (e.g. bit error rate or frame error rate), or delay or distortion of such communications. The information of the measurement results may then be used e.g. by the controller functionality. For example, the controller may use the information to decide an appropriate cell that can be selected for serving the mobile station.

Figure 2 shows in more detail a mobile station and base station pair capable of operation in the system of figure 1. The mobile station, which in this case is a cellular telephone, includes a radio transceiver unit 20, a measurement unit 21 and a control unit 22. The base station includes correspondingly a radio transceiver unit 23, a measurement unit 24 and a control unit 25. The controller BSC is shown to include a control unit 26 for accomplishing computations of the embodiments of the invention. These units may be implemented as distinct units as illustrated in figure 2 or by software running on common hardware.

The transceiver 20 of the mobile station transmits traffic signals to and receives traffic signals from one or more base stations to which the mobile station is currently attached.

The transmissions to and from the mobile station are split into multiframe, each of which occupies a certain predefined time, e.g. 480ms. The transceiver may also receives signals from other base stations, typically signals on one or more broadcast channels e.g. BCCH. These signals as well as signals received from the base station(s) to which the mobile station is attached are directed to the measurement unit 21. The measurement unit measures a predefined feature of those signals as mentioned above - for example the bit error rate (BER) of the received signal. The measurement results are passed to the control unit 22 which generates appropriate measurement reports in accordance with the used standard. The measurement reports are then transmitted to the base station(s) to which the mobile station is attached. The measurement reports are then used by the network, e.g. to make handover or load balancing decisions.

The mobile station MS is arranged to measure and report a downlink bit error rate (DL BER) for the signals received from the base station BTS to the controller BSC via the base station BTS by an appropriate measurement report mechanism. For example, in the GSM networks the BER is reported by the mobiles to the system as RXQUAL message (received transmission quality). The base station is arranged to measure an uplink bit error rate (UL BER) for the transmission received from the mobile station. The UL BER is reported to the BSC in order to be used for statistics and the handover and power control mechanisms. The UL BER may also be used in one of embodiments of the invention, as will be described later in this specification. The base station BTS is also arranged to determine a uplink erasure ration (UL FER) based on Bad Frame Indicator (BFI) calculations.

According to an embodiment of the invention the UL FER, UL BER and DL BER are used to estimate the DL FER. In this embodiment the estimation is based on the realisation that the changes and/or new features, such as Frequency Hopping and Dynamic Channel Coding, have the same effect over the Error Correction mechanism in the uplink and downlink directions. Therefore the change in the indicators is also equivalent. This means that the correlation between the BER and the FER in the Uplink will be the equivalent to the corresponding correlation of the BER and the FER in the downlink. Thus by calculating a BER-FER correlation in up-link the DL FER can be derived from by means of the DL BER. This can be exemplified by the equation:

$$DL\ FER = DL\ BER \times UL\ FER / UL\ BER$$

The required calculations for the estimation may be accomplished in the network controller, such as the BSC. According to one alternative the calculations are accomplished in the base station by the control unit thereof.

The above embodiment enables use of the FER even with terminals that do not support FER reporting, and thereby the embodiments enable FER based quality estimation even when such mobile stations are used.

According to an alternative the mobile station determined two indicators for the connection quality and is provided with an indicator (e.g. UL BER) determined by the base station. In this embodiment the mobile station will then determine the "missing" indicator from the comparison of the three measured indicators. In other words, in this case the above presented exemplifying equation would be:

$$UL\ FER = UL\ BER \times DL\ FER / DL\ BER$$

It should be appreciated that whilst embodiments of the present invention have been described in relation to mobile stations, embodiments of the present invention are applicable  
5 to any other suitable type of user equipment, including terminals with fixed line connections.

It is also noted herein that while the above describes exemplifying embodiments of the invention, there are several  
10 variations and modifications which may be made to the disclosed solution without departing from the scope of the present invention as defined in the appended claims.

**Claims**

1. A method in a communication system for estimating a network indicator of a communication path between a first station and a second station comprising:
- 5 determining at the second station a first indicator of the communication path in a direction from the first station to the second station;
- determining at the first station a second indicator of the communication path in a direction from the second station to the first station, said second indicator associating with a corresponding feature of the communication path than said first indicator;
- 10 determining at the second station a third indicator of the communication path in the direction from the first station to the second station; and
- estimating the network indicator of the communication path in the direction from the second station to the first station based on the determined first, second and third indicators, said network indicator associating with a corresponding feature of the communication path than said third indicator.
- 20
2. A method according to claim 1, wherein the second station comprises a base station of a cellular communication system, the first station comprises a mobile station of the cellular communication system, the communication path comprises a radio link between the stations, the first indicator comprises a bit error ratio in uplink direction, the second indicator
- 25 comprises a bit error ratio in downlink direction; the third indicator comprises a frame erasure ratio in uplink direction; and the network indicator to be estimated comprises a frame erasure ratio in downlink direction.
- 30

3. A method according to claim 1 or 2, wherein the estimated network indicator is used for assessing the quality of the communication path.

5 4. A method according to claim 3, wherein voice quality of the transmission via the communication path is assessed.

5. A method according to any of the preceding claims, wherein the network indicator is obtained based on a

10 correlation between the first indicator, the second indicator and the third indicator.

6. A method according to claim 5, wherein the network indicator is obtained by multiplying said second indicator by  
15 the third indicator and dividing the result by the first indicator.

7. A method according to any of the preceding claims, comprising passing information about the first indicator, the  
20 second indicator and the third indicator to a controller of the communication system and computing the network indicator by the controller.

8. A communication system comprising:

25 a first station;

a second station;

a communication path between the first and the second stations;

a measurement unit at the second station for determining  
30 a first indicator of the communication path in a direction from the first station to the second station;

a measurement unit at the first station for determining a second indicator of the communication path in a direction from the second station to the first station, said second indicator

associating with a corresponding feature of the communication path than said first indicator;

a measurement unit at the second station for determining a third indicator of the communication path in the direction  
5 from the first station to the second station; and

control unit for estimating a further indicator of the communication path based on the determined first, second and third indicators, said further indicator associating with a corresponding feature of the communication path than said  
10 third indicator.

9. A communication system according to claim 8, wherein the second station comprises a base station of a cellular communication system, the first station comprises a mobile  
15 station of the cellular communication system, the communication path comprises a radio link between the stations, the first indicator comprises a bit error ratio in uplink direction, the second indicator comprises a bit error ratio in downlink direction; the third indicator comprises a  
20 frame erasure ratio in uplink direction, and the further indicator comprises a frame erasure ratio in downlink direction.

10. A communication system according to claim 8 or 9, wherein  
25 the estimated indicator is used for assessing the quality of the communication path.

11. A communication system according to any of claims 8 to 10, wherein the control unit is arranged to correlate the  
30 first indicator, the second indicator and the third indicator for obtaining the further indicator.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number  
**WO 01/24418 A1**

- (51) International Patent Classification<sup>7</sup>: H04B 17/00, H04Q 7/38, H04L 1/20 (74) Agents: RUUSKANEN, Juha-Pekka et al.; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).
- (21) International Application Number: PCT/EP00/09499 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (22) International Filing Date:  
27 September 2000 (27.09.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
9923069.0 29 September 1999 (29.09.1999) GB
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- Published:  
— With international search report.
- (72) Inventor; and  
(75) Inventor/Applicant (*for US only*): MELERO, Juan [ES/GB]; 2A Adele Avenue, Digswell, Hertfordshire AL6 0AU (GB).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ESTIMATING AN INDICATOR FOR A COMMUNICATION PATH

Determine a BER for the uplink/Determine a BER for the downlink/Determine a FER for the uplink

Transmit the determined information to a controller

Estimate at the controller a FER for the downlink based on the received BERs and the FER

(57) Abstract: The present invention relates to estimation of a network indicator of a communication path between a first station and a second station in a communication system. A first indicator of the communication path in a direction from the first station to the second station is determined at the second station. A second indicator of the communication path in a direction from the second station to the first station is determined at the first station. Said second indicator associates to a corresponding feature of the communication path than said first indicator. A third indicator of the communication path in the direction from the first station to the second station is determined at the second station. The network indicator of the communication path in the direction from the second station to the first station is then estimated based on the determined first, second and third indicators.

WO 01/24418 A1



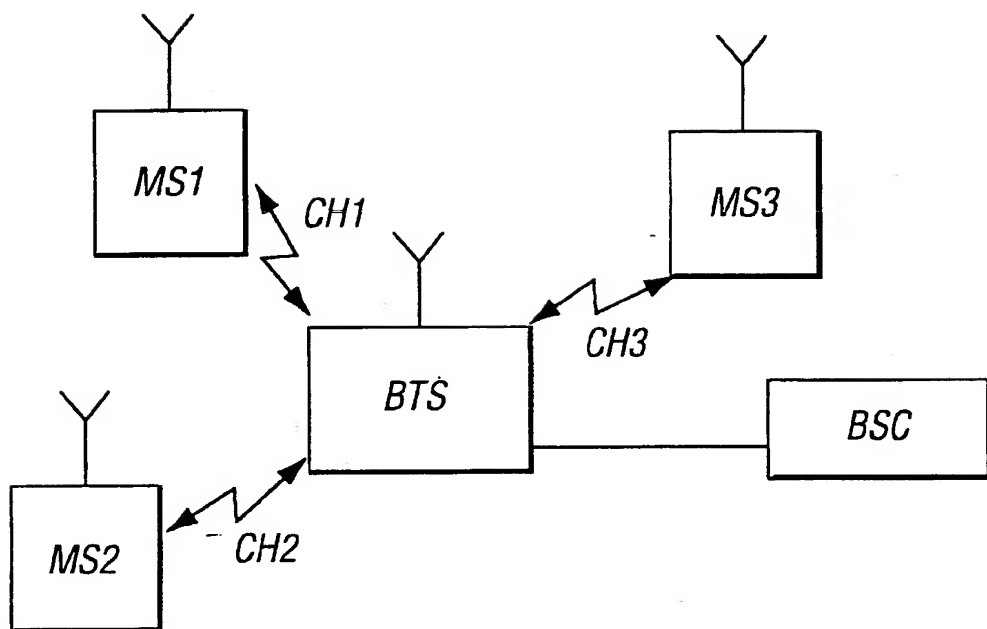


FIG. 1

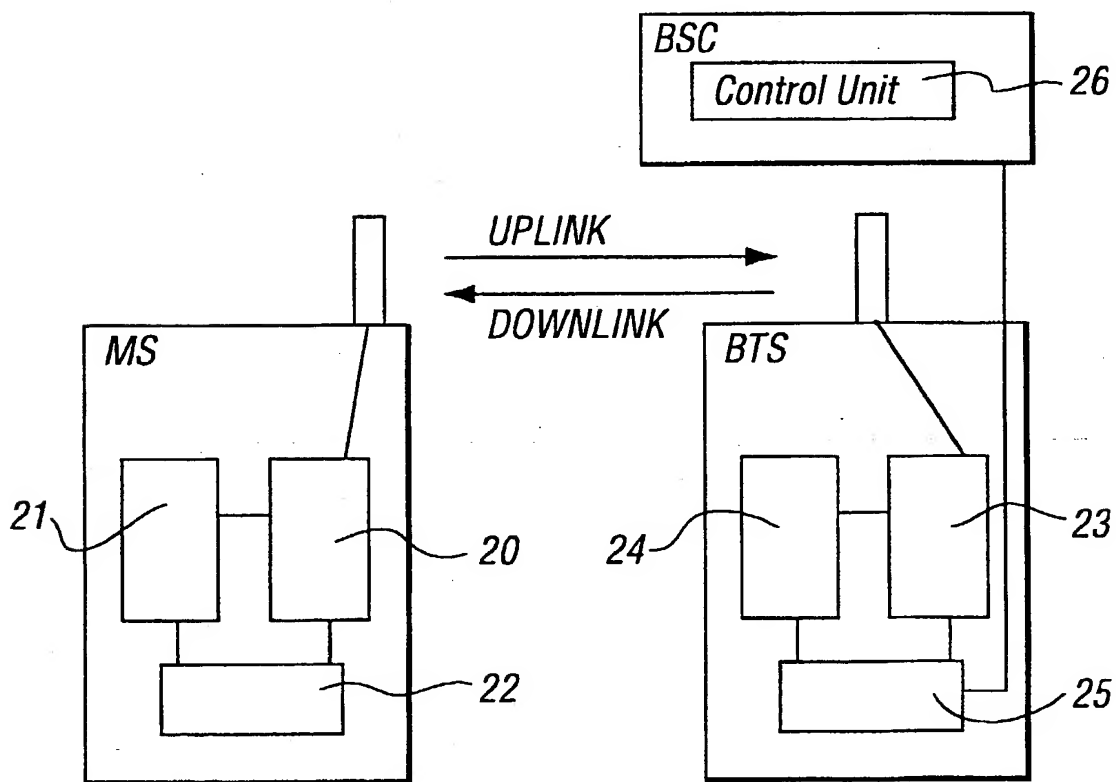
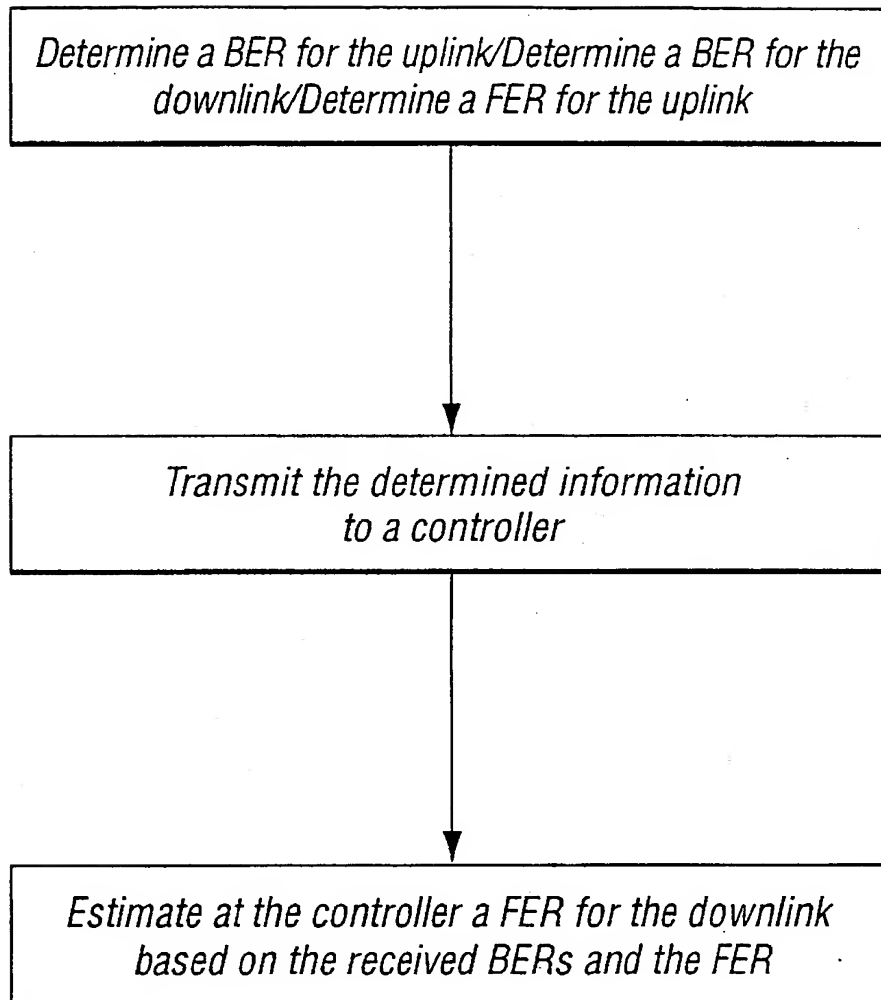


FIG. 2

FIG. 3

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY**  
 Includes Reference to PCT International Applications

 Attorney's Docket  
 No. 4925-226PUS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**ESTIMATING AN INDICATOR FOR A COMMUNICATION PATH**

the specification of which (check only one item below)

☐ is attached hereto

☐ was filed as United States application

Serial No. \_

on \_

and was amended

on \_ (if applicable).

☒ was filed as PCT international application

 Number PCT/EP00/09499

 on 27 September 2000

and was amended under PCT Article 19

on \_ (if applicable).


I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

**PRIOR FOREIGN/PCT APPLICATIONS AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:**

Country (if PCT, indicate "PCT")	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 35 U.S.C. 119	
Great Britain	9923069.0	29 September 1999	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
PCT	PCT/EP00/09499	27 September 2000	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO
			<input type="checkbox"/> YES	<input type="checkbox"/> NO

Combined Declaration for Patent Application and Power of Attorney (Continued) (Includes Reference to PCT International Applications)				Attorney's Docket No. 4925-226PUS	
I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT international filing date of this application:					
PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:					
U.S. APPLICATIONS			STATUS (check one)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED	
PCT APPLICATIONS DESIGNATING THE U.S.					
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)			
PCT/EP00/09499	27 September 2000			X	
<b>POWER OF ATTORNEY:</b> As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith ( <i>List name and registration number</i> ) MYRON COHEN, Reg. No. 17,358; THOMAS C. PONTANI, Reg. No. 29,763; LANCE J. LIEBERMAN, Reg. No. 28,437; MARTIN B. PAVANE, Reg. No. 28,337; MICHAEL C. STUART, Reg. No. 35,698; KLAUS P. STOFFEL, Reg. No. 31,668; EDWARD WEISZ, Reg. No. 37,257; VINCENT M. FAZZARI, Reg. No. 26,879; JULIA S. KIM, Reg. No. 36,567; ALFRED FROEBRICH, Reg. No. 38,887; ALFRED H. HEMINGWAY, JR., Reg. No. 26,736; KENT H. CHENG, Reg. No. 33,849; YUNLING REN, Reg. No. 47,019; ROGER S. THOMPSON, Reg. No. 29,594; BRICE FAILER, Reg. No. 29,532; DAVID J. ROSENBLUM, Reg. No. 37,709; TONY CHEN, Reg. No. 44,607; TEODOR J. HOLMBERG, Reg. No. 50,140.					
Send correspondence to: Michael C. Stuart Reg. No. 35,698 Cohen, Pontani, Lieberman & Pavane 551 Fifth Avenue, Suite 1210 New York, New York 10176			Direct Telephone calls to: (name and telephone number) Michael C. Stuart (212) 687-2770		
		 <b>27799</b> PATENT TRADEMARK OFFICE			
201	FULL NAME OF INVENTOR	FAMILY NAME <b>MELERO</b>	FIRST GIVEN NAME <b>Juan</b>	SECOND GIVEN NAME <b>GOX</b>	
	RESIDENCE, CITIZENSHIP	CITY <b>Digswell</b>	STATE OR FOREIGN COUNTRY <b>United Kingdom</b>	COUNTRY OF CITIZENSHIP <b>Spain</b>	
	POST OFFICE ADDRESS	POST OFFICE ADDRESS <b>2A Adele Avenue</b>	CITY <b>Digswell</b>	STATE & ZIP CODE/COUNTRY <b>Hertfordshire AL6 0AU United Kingdom</b>	
202	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME	
	RESIDENCE, CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP	
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY	

Combined Declaration for Patent Application and Power of Attorney (Continued) (Includes Reference to PCT International Applications)			Attorney's Docket No. 4925-226PUS
1	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME
2	RESIDENCE, CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY
3	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY
STATE & ZIP CODE, COUNTRY			
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.</p>			
SIGNATURE OF INVENTOR 201		SIGNATURE OF INVENTOR 202	
DATE: 24.6.2002		DATE	
		SIGNATURE OF INVENTOR 203	
		DATE	